

Probabilistic estimation of annual lost economic production due to premature deaths because of earthquakes

Mario A. Salgado-Gálvez, Gabriel A. Bernal, Alex H. Barbat, Martha L. Carreño & Omar-Darío Cardona

To cite this article: Mario A. Salgado-Gálvez, Gabriel A. Bernal, Alex H. Barbat, Martha L. Carreño & Omar-Darío Cardona (2016) Probabilistic estimation of annual lost economic production due to premature deaths because of earthquakes, Human and Ecological Risk Assessment: An International Journal, 22:2, 543-557, DOI: [10.1080/10807039.2015.1095072](https://doi.org/10.1080/10807039.2015.1095072)

To link to this article: <http://dx.doi.org/10.1080/10807039.2015.1095072>



Accepted author version posted online: 05 Oct 2015.
Published online: 05 Oct 2015.



Submit your article to this journal [↗](#)



Article views: 50



View related articles [↗](#)



View Crossmark data [↗](#)



Citing articles: 1 View citing articles [↗](#)

Probabilistic estimation of annual lost economic production due to premature deaths because of earthquakes

Mario A. Salgado-Gálvez^a, Gabriel A. Bernal^a, Alex H. Barbat^a, Martha L. Carreño^a, and Omar-Darío Cardona^b

^aCentre Internacional de Metodes Numerics en Enginyeria (CIMNE), Universitat Politècnica de Catalunya, Barcelona, Spain; ^bInstituto de Estudios Ambientales (IDEA), Universidad Nacional de Colombia Sede Manizales, Manizales, Colombia

ABSTRACT

A methodology to estimate, in a probabilistic way, the annual cost to society of premature deaths because of earthquakes is proposed in this article. The methodology makes use of results obtained by means of prospective and probabilistic seismic risk assessments where expected deaths caused by the collapse of buildings are obtained. Those results, combined with demographic and macroeconomic indicators such as the age distribution, life expectancy at birth, and per capita gross domestic product, are used to estimate the cost to society in terms of lost productivity due to premature mortality because of earthquakes. The proposed methodology does not attempt to estimate nor assign a cost to human lives at any stage, but the one associated to lost productivity at the societal level. One of the descriptors of the methodology is part of the components of the disability adjusted life year, a widely used metric in the public health field that estimates the burden of diseases based mostly on historical data. As an example, the methodology is applied to Medellín, the second largest city of Colombia, finding that the cost of lost productivity due to premature mortality because of earthquakes has a similar order of magnitude to the direct physical losses in the public and private building stock calculated in a previous probabilistic seismic risk assessment.

ARTICLE HISTORY

Received 23 April 2015
Revised manuscript accepted
14 September 2015

KEYWORDS

probabilistic seismic risk assessment; average annual deaths; earthquake casualties; disability adjusted life year; CAPRA

Introduction

An estimated of 720,000 deaths because of more than 460 earthquakes have been recorded since 1999 around the world (Guha-Sapir *et al.* 2015). Besides being per se a shocking figure, the issue is aggravated with the fact that more than 90% of them have occurred in developing countries. It has been largely stated that earthquakes do not kill people but structures that collapse do and, poor construction practices besides building codes with low standards and enforcement levels can still be found at worldwide level. Probabilistic seismic risk models allow the estimation of damages and losses on the exposed assets and, depending on the

CONTACT Mario A. Salgado-Gálvez ✉ mario.sal.gal@gmail.com 📍 Centre Internacional de Metodes Numerics en Enginyeria (CIMNE), Universitat Politècnica de Catalunya, Edifici C-1, Despatx C-111 Carrer Gran Capità, S/N, Campus Nord UPC, Barcelona, Spain

© 2016 Taylor & Francis Group, LLC

available information also the estimation of casualties, both injured and deaths. Even more, the estimation of casualties is considered one of the most important outputs since the main purpose of any comprehensive seismic risk management scheme is to protect lives (Olson and Wu 2010).

Most of the published seismic risk assessments have estimated damages and losses on the exposed elements but there have also been cases where deaths associated to earthquakes occurrence have been calculated at different resolution levels (Algermissen *et al.* 1972; McClure *et al.* 1979; Reitherman 1982; Marulanda *et al.* 2013; Salgado-Gálvez *et al.* 2015a). There are also different approaches to estimate deaths, ranging from single-scenario approaches where only one event of interest is considered, to fully probabilistic assessments where the contributions of several events with different occurrence probabilities are accounted for. Anyhow, it has not yet been proposed a way to estimate the impact and consequences of those deaths in the society apart of calculating the overall figure. This article proposes a methodology to estimate the cost to society in terms of the lost production due to premature mortality because of earthquakes considering demographic and macroeconomic indexes. It is important to make it clear that the objective of the proposed methodology is not, by any means, to assign a value to the lives of the inhabitants of the area under study.

In the public health field, the disability adjusted life year (DALY) is a commonly used metric developed in the 1990s as a measure of disease burden for comparison of overall health and life expectancy in different countries. One DALY corresponds then to one lost year of healthy life. According to the methodology proposed by the World Health Organization in the latest release of the global burden of disease (WHO 2013) it is estimated by adding two components as follows:

$$DALY = YLD + YLL \quad (1)$$

where *YLD* is the adjusted number of years lived with disability and *YLL* is the number of years of life-lost due to premature mortality. *YLL* is calculated as the number of deaths multiplied by the life expectancy at the age of death. The estimation of that metric is based mostly on historical data and, therefore, it can be classified as a retrospective one.

Based on one of the ideas behind the DALY, the estimation of the average number of years of lost-life due to premature mortality because of earthquakes, *YLL*, is proposed herein. *YLL* consider only those deaths associated to building collapse by using probabilistic catastrophe models (cat-models) instead of historical data, being then a prospective metric.

Regarding *YLD*, although with state-of-the-art cat-models it is possible to estimate the expected number of injured because of earthquakes, it is not possible to accurately make estimations of the kind of injuries and therefore, the time either to remission or death. Because of that, it is not possible to yet estimate *YLD* due to earthquakes in a prospective way and, therefore, it is not included in the estimation of lost production.

In the earthquake engineering field, metrics based on DALYs have been proposed, such as the Economic Adjusted Life Years (Scawthorn 2011), which, based on historical earthquake monetary loss estimations and average annual wages per capita, made comparative assessments of earthquakes occurring between 1906 and 2004.

Considering the participation of all the possible earthquakes in the area under analysis, collapse probabilities and fatality rates per building class, the average annual number of

deaths (AAD) is estimated and, then, based on demographic data such as age distribution and life expectancy at birth, the average number of years of lost-life due to premature mortality because of earthquakes is estimated. Finally, an order of magnitude, in terms of lost productivity associated to the average annual number of years of life-lost due to premature mortality is obtained.

The importance to reduce disaster casualties has been acknowledged by the Tokyo Metropolitan Government, who has announced to follow specific and measurable risk reduction targets to achieve this goal (RMS 2015). The use and development of vulnerability functions to estimate deaths associated to earthquakes following the methodology proposed in this article can help to assess the performance of certain goals.

Previous studies have addressed the topic of lost productivity years, number of life-lost years and overall lost production using only retrospective approaches for tsunami (Krishnamoorthy *et al.* 2005) and earthquakes (Wang *et al.* 2008). For the case of tsunami, based on the December 2004 Sumatra event deaths statistics, a sub-national estimation of *YLL* was performed in India and, based on the working age group and minimum wage figures, the lost productivity during one month was calculated. For the case of earthquakes, using the statistics of the 2008 Wenchuan event, the effect of injuries in public health of China in terms not only of death causes but lost of potential productive years has been highlighted. Finally, a non-monetary metric to account for the direct impact of natural disasters with different origins was introduced by Noy (2014, 2015) and applied at global level based also in disaster databases. Although the estimation of the impact in this dimension is very useful, it is also known that for catastrophic events the scarce historical data is not enough to have a complete overview of the problem and, therefore, prospective and probabilistic approaches such as the used herein are proposed.

The results that can be obtained with this methodology can also contribute to raise risk awareness, besides allowing the development and promotion of risk mitigation strategies through increasing building code compliance in case of new buildings and by promoting structural retrofitting schemes for the case of existing ones (at least in buildings classified as critical facilities), bearing in mind that the main objective of them is to protect the life of its occupants which in an indirect way serves also as a measure to protect wealth and property. The results obtained with this proposed methodology should be seen as complementary to the ones obtained with the traditional probabilistic risk assessments performed for the built stock. Also, since the objective of the methodology is to estimate the lost production, the *YLL* is needed instead of the classical estimation of people killed by earthquakes, which are expressed in number of deaths.

An application of the proposed methodology is presented for Medellín, Colombia, which is an urban center with more than two million inhabitants that lies in an intermediate seismic hazard zone (AIS 2010). The results of lost productivity are compared against those previously estimated for the city that only considered the direct losses on the public and private building portfolio (Salgado-Gálvez *et al.* 2014) and it is shown how the ratio between the losses is higher than the unit, a reason why this proposed approach should also be considered within a comprehensive seismic risk management framework.

Probabilistic seismic risk assessment

This section presents a summary of the methodology used for the prospective estimation of deaths because of earthquakes. It follows a probabilistic approach from the hazard and vulnerability perspective where different requirements need to be fulfilled.

When modeling earthquake risk, one must be aware of the large amount of uncertainties related mainly to the hazard and to the vulnerability (Ordaz 2000; Grossi 2004; Murphy *et al.* 2011; Marulanda *et al.* 2013; Salgado-Gálvez *et al.* 2014, 2015b). Because of that, those uncertainties need to be quantified and rigorously propagated through the loss estimation process and it can only be achieved if probabilistic risk models are used. The inputs for the risk model can be classified into the following three categories: (1) hazard, (2) exposure, and (3) vulnerability. For the hazard representation, a set of stochastic events that contain all the possible ways in which earthquakes may manifest in the area under analysis is required. The events need to be collectively exhaustive, mutually exclusive and describe the spatial and temporal variation of the hazard. Exposure can be modeled at different resolution levels, ranging from coarse grain data such as the used in the Global Assessment Report 2015 (UNSIDR 2015) to detailed dwelling by dwelling databases; in all cases, an identification and characterization of the exposed elements is required and attributes such as the construction material, number of stories, structural system and number of occupants need to be included. Finally, vulnerability functions that relate different hazard intensity levels with the losses in the exposed elements are assigned to each building class. Losses can have different dimensions such as the one related to the damage in physical infrastructure and the one that accounts for the human affection. The latter is the one of interest in the methodology proposed herein.

Since it is not possible to directly calculate the probability distribution function of losses conditional to the occurrence of an event, the following procedure proposed by Ordaz (2000) is used:

$$f(l_j | Event_i) = \int_0^{\infty} f(l_j | Sa) f(Sa | Event_i) dSa \quad (2)$$

In Eq. (2), two different conditional probability functions are chained, where the first one has to do with the vulnerability (the expected loss given a hazard intensity) and the second part with the hazard (the hazard intensity given the occurrence of the event).

One of the most robust probabilistic risk metrics is the average annual loss (AAL) (Marulanda 2013) which can be computed using the following equation:

$$AAL = \sum_{i=1}^N E(L | Event_i) \cdot F_A(Event_i) \quad (3)$$

where $E(L | Event_i)$ is the mean loss value given the occurrence of the i^{th} event and $F_A(Event_i)$ is the associated annual occurrence frequency of the same event. This approach requires an exhaustive set of hazard events which can be obtained by using probabilistic seismic hazard assessment (PSHA) programs like CRISIS2008 (Ordaz *et al.* 2013). Nevertheless, in some cases, seismic hazard information is not available in that representation but in terms of

intensity exceedance curves (also known as hazard curves), which, in the case of earthquakes usually relate acceleration levels with their corresponding annual exceedance rates. Based on that information, it is also possible to calculate the *AAL* by using the following expression:

$$AAL = \sum_{i=1}^K \int_0^{\infty} -\frac{dv(a)}{da} \cdot E(l|a)_i \cdot da \quad (4)$$

In this case $v(a)$ is the annual hazard intensity exceedance rate, K is the total number of exposed assets, a is the hazard intensity and $E(l|a)$ is the expected value of the loss given a hazard intensity a in the i^{th} exposed element. If PSHA has been performed in a rigorous and exhaustive way, the use of either Eqs. (2) or (3), would lead to the same value of *AAL*.

Within a probabilistic risk assessment framework, the vulnerability functions allow obtaining losses in different dimensions such as monetary losses and casualties. These functions relate the expected hazard intensities with the expected consequences and efforts have been made worldwide to develop relationships that allow estimating casualties, both in terms of injured and deaths, associated to earthquakes (Coburn and Spence 2002; FEMA 2003; Spence and So 2009; Jaiswal and Wald 2010; Jaiswal *et al.* 2011), which are based mostly on post-earthquake surveys. It is well-known that this is a difficult task since high variability in the number of deaths can be observed from event to event, even when dealing with earthquakes of similar magnitudes, depths and building stock characteristics. Based on those studies, it has been possible to define lethality rates by building class to estimate the expected deaths for each category. Those rates are estimated as the ratio of death people to building occupants and depend on the building class and collapse mechanism, among some other structural characteristics. Also, regardless the building class, the fatality rates tend to increase with the number of stories. Figure 1 shows the vulnerability function in terms of the expected value of lethality rates for high-rise reinforced concrete dwellings as an example. The hazard intensity is the spectral acceleration at the fundamental elastic period of the structure that is the hazard parameter that better correlates the expected damage and losses (Luco and Cornell 2007).

It is worth mentioning that only indoor mortality is considered with these functions but it is also the case where most of the deaths occur, not ignoring that people exposed to failing objects outdoors can also be affected.

Proposed methodology

The proposed methodology is presented herein and each of the input data needed to estimate the average annual production cost lost due to premature mortality because of earthquakes are explained. It is important to mention that the methodology can be applied considering other hazards such as tropical cyclones, volcanic ash, and tsunami, as long as vulnerability functions that allow estimating deaths associated to them can be developed and the available hazard representation allows estimating average annual losses. Also, the proposed methodology can be applied at different resolution levels, an issue that provides opportunities to estimate the cost to society for example at country, subnational and/or local level.

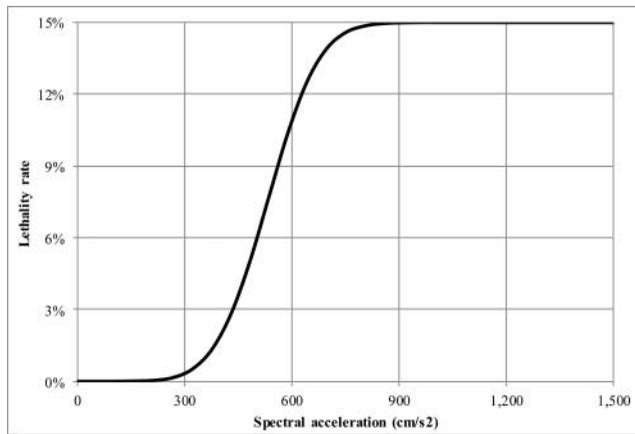


Figure 1. Example of deaths vulnerability function for high-rise reinforced concrete dwellings.

Estimation of the average annual deaths

Estimation of deaths caused by the collapse of buildings during an earthquake using state-of-the-art risk models still constitutes a big challenge (Ferreira *et al.* 2011). It is not only because population data to be included in the exposure databases are a dynamic parameter that depends on the day, time and even season but also, because the existing casualties' consequences databases provide limited information to develop vulnerability functions in this loss dimension for the reasons explained before. The estimated number of deaths due to earthquakes at this stage is only associated to building collapse and not to secondary hazards like tsunamis, landslides, and fires. Even if it is also known that this is not the only cause of deaths during earthquakes, since other causes like heart attacks also add to the final figure, it has been established that almost 90% of the deaths caused by earthquakes around the world are due to structural collapse (Coburn and Spence 2002).

The first input to the calculation is the AAD because of earthquakes, a metric that is based on the same basis and assumptions than the AAL, which can be summarized as: (1) it considers the participation of all possible earthquakes; (2) an infinite timeframe for the occurrence of the events is assumed; and (3) damaged structures are rebuilt or repaired to meet the initial conditions after they have been damaged; the same applies to the human occupation levels.

Analogously to the AAL presented in Eq. (3), the AAD because of earthquakes can then be obtained and can be computed directly when using an event-based risk assessment by means of the following:

$$AAD = \sum_{i=1}^N E(D | Event_i) \cdot F_A(Event_i) \quad (5)$$

where N is the total number of representative hazard events, $F_A(Event_i)$ is the annual frequency of occurrence of the i^{th} hazard event and $E(D | Event_i)$ are the expected deaths because of collapse of the exposed assets given that the i^{th} event occurred. In the cases where no stochastic representation for the seismic hazard is available, Eq. (4) can be used bearing

in mind that the estimated loss has a human deaths dimension. Since occupancy is a dynamic parameter and, neither its daily or seasonal variations can be well established, average occupancy rates like the ones proposed by Liel and Deierlein (2012) that account for occupancy ratios according to day and time of the day can be used.

If AAD is calculated for other hazards, it can be added arithmetically since it corresponds to an expected value. This allows the implementation of the proposed methodology in multi-hazard risk assessments, suitable for areas where more than one hazard can cause significant consequences to its inhabitants.

Age distribution

Based on censal data, it is possible to establish the age distribution of the inhabitants the area under analysis. Usually, the data are grouped into age ranges of 5 to 10 years spans and are updated on a regular basis. The age distributions to be used in the proposed methodology correspond to the most updated at the moment of the analysis. Assuming that there are M age ranges, the population distribution can be estimated for each of them and denoted as P_r . A uniform age distribution based on the demographic statistics is assumed for the area of analysis. Since all the inhabitants fall only into one of the age ranges, the following condition is met:

$$\sum_{n=1}^M P_r = 1.0 \quad (6)$$

It may be argued that the age distribution of the overall population changes with time but, in order to be consistent with the probabilistic risk assessment framework used herein, what is considered are today's characteristics.

Average annual deaths by age range

Based on the P_r and having previously calculated the AAD, it is possible to estimate the AAD_i which corresponds to the average annual deaths by age range, obtained by multiplying the total AAD by the correspondent P_r factor. This step assumes that the age distribution of the deaths because of earthquakes have the same characteristics as that for the base population, which can be considered an appropriate assumption in the case of earthquakes since, in the type of injuries that cause deaths, the age factor does not constitute a differential cause. In all cases:

$$\sum_{i=1}^M AAD_i = AAD \quad (7)$$

Life expectancy at birth

Life expectancy at birth is usually available from official sources given its importance in different social, security, economic, and public health aspects. For the area under analysis a unique value for it is needed in this proposed methodology, reason why, if the available

information is disaggregated by for example, gender or smaller geographical units, a weighted average can be calculated. Unitary years of lost-life because any cause by age ranges (L_i) can be obtained by calculating the difference between the life expectancy at birth and the mean value of the age range (*i.e.*, if the age range is 20–24 years, the mean value is 22.5 years). With this, it is being assumed that years within each age range are uniformly distributed. Life expectancy at birth at the moment of the analysis is to be used again to be consistent with the probabilistic risk assessment framework.

Years of life-lost due to premature mortality because of earthquakes

By multiplying L_i by AAD_i , the YLL_i are obtained corresponding thus to the average annual number of years of life-lost due to premature mortality because of earthquakes by age range. Since this is an expected value, it can be arithmetically added and, the sum of the YLL_i of the M age ranges corresponds to the overall average annual number of years of life-lost due to premature mortality because of earthquakes for the area under analysis (YLL):

$$YLL = \sum_{i=1}^M YLL_i \quad (8)$$

Average annual lost productivity cost due to premature mortality because of earthquakes

To relate the average annual number of years of life-lost due to premature mortality because of earthquakes with its consequences on production, the gross domestic product (GDP) per capita is used. It is widely accepted that GDP is the economic index that best measures economic welfare and, that due to the characteristics of an economy it can either represent the income of all the members of an economy or the total expenditure in the production of goods and services in it. *DALYs* estimations in some cases have appraised the years according to the age, based on the fact that it is during the working-age range that the peak productivity exists for each individual; this procedure is known as social weighting (WHO 2004). In this article, the estimation of the lost productivity only considers the YLL_i associated to the working-age population which, according to the Organization for Economic Co-operation and Development (OECD), is constituted by those aged 15 to 64 (OECD 2014). Within that range, all years are considered to contribute equally to productivity. Therefore, the average annual lost productivity due to premature mortality because of earthquakes ($AALP_{YLL}$) is estimated by means of the following:

$$AALP_{YLL} = YLL_{(15-64)} \cdot GDP_{/capita} \quad (9)$$

It is important to bear in mind that the same assumptions made for the calculation of *AAL* apply to the $AALP_{YLL}$, from where the most important is, that the estimated cost represents an average value that can be interpreted as the long-term annualized cost of lost productivity due to premature deaths caused by possible earthquakes with different magnitude, depth, and location. This approach also follows the premise that saving a life is independent of the life saved.

Both AAD and $AALP_{YLL}$ are relevant risk metrics that cover a dimension that, so far, has not been explicitly addressed in a probabilistic and prospective way. In most probabilistic risk assessments only direct losses associated to physical damages of the built stock are obtained and in some cases used as a basis for the estimation of economic flow variations that account for the indirect losses; none of them account for the expected lost productivity due to premature mortality and this innovative proposal aims to cover that field that may be of special importance in dense population settlements located in earthquake prone regions. The estimation of $AALP_{YLL}$ also serves as a basis to estimate the order of magnitude of what a society should be willing to spend to protect and save itself against natural disasters (Rosenblueth 1976).

The proposed methodology has some limitations that are important to highlight with the objective of promoting future research that may contribute to improvements. First, only the life-years lost due to premature mortality are considered herein and it would be desirable to be able to estimate YLD and assess its impact in terms of lost productivity. Second, deaths associated to other damage states different than collapse and occurring outdoors, although being a small fraction, if considered will provide a comprehensive framework for deaths estimation and subsequent lost productivity assessment.

Application at the urban level in Medellín, Colombia

The proposed methodology is applied to Medellín, Colombia. The city has more than two million inhabitants and is located on an intermediate seismic hazard zone with peak ground accelerations (PGA) of 0.15g associated to a mean return period of 475 years (AIS 2009; Salgado-Gálvez *et al.* 2010, 2015c). The city has complete and high quality information regarding the different aspects that are required for the analysis and the results are presented herein.

First, the estimation of AAD is performed using the program CAPRA-GIS (ERN-AL 2011) which is the probabilistic risk calculator of the CAPRA Platform (www.ecapra.org; Cardona *et al.* 2010, 2012; Marulanda *et al.* 2013; Velásquez *et al.* 2014). The input data in terms of seismic hazard and exposure are the same as those used for the estimation of losses on the building portfolio (Salgado-Gálvez *et al.* 2014) but the vulnerability functions, since the loss dimension of interest in this case is different, are in terms of lethality rates for each building class. In summary, the seismic hazard is estimated at bedrock level and is represented through a set with more than 1800 stochastic events and, spectral transfer functions are also defined for the different soil zones to account for the dynamic soil response which is not negligible in the city. The public and private building stock has more than 240,000 dwellings with different structural characteristics whose details can be found in Salgado-Gálvez *et al.* (2014). Urban population projected for the year 2015 is equal to 2,218,192 inhabitants (DANE and Alcaldía de Medellín 2010) and is distributed by buildings considering their main use and making use of official population density data. An occupation rate of 60%, following the distributions proposed by Liel and Deierlein (2012) has been assumed. This is needed since more than 1800 possible earthquakes, with different magnitudes, locations, and occurrence frequencies are considered in the analysis for which the day and time of occurrence is unknown.

AAD is estimated in 2,187 people for Medellín, which in relative terms correspond to 0.99‰ of the total population count. Higher values are expected for reinforced concrete

Table 1. Age distribution.

Age range	Number of inhabitants	Relative number of inhabitants
0 to 4	127,152	5.73%
5 to 9	131,189	5.91%
10 to 14	132,672	5.98%
15 to 19	151,863	6.85%
20 to 24	169,467	7.64%
25 to 29	182,798	8.24%
30 to 34	168,471	7.59%
35 to 39	147,581	6.65%
40 to 44	130,319	5.88%
45 to 49	168,822	7.61%
50 to 54	181,808	8.20%
55 to 59	158,137	7.13%
60 to 64	125,673	5.67%
65 to 69	92,907	4.19%
70 to 74	58,501	2.64%
75 to 79	43,606	1.97%
80+	47,226	2.13%
TOTAL	2,218,192	100%

buildings of medium and high-rise if compared to the non-engineered low-rise structures made of wood and zinc that do not cause as many deaths in case of collapse if compared with middle and high-rise reinforced concrete frames.

Based on the official demographic information (DANE and Alcaldía de Medellín 2010), age distribution by 5 year span ranges is available as shown in [Table 1](#).

With this information, it is now possible to estimate AAD_i as presented in [Table 2](#). As explained, the sum of the AAD_i corresponds to the overall AAD .

Medellín is divided into 16 counties (*comunas*) that have similar geographical extension but different socioeconomic characteristics. Since life expectancy at birth corresponds to a metric that has different values even when considering the same urban center because of social, safety and public health issues, available data are disaggregated, in this case at county

Table 2. Average annual deaths by age range.

Age range	AAD_i
0 to 4	125
5 to 9	129
10 to 14	131
15 to 19	150
20 to 24	167
25 to 29	180
30 to 34	166
35 to 39	146
40 to 44	128
45 to 49	166
50 to 54	179
55 to 59	156
60 to 64	124
65 to 69	92
70 to 74	58
75 to 79	43
80+	47
TOTAL	2,187

Table 3. Life expectancy at birth and population distribution by county.

County	Life expectancy at birth	Population	% Population
Popular	74.98	130,369	5.88%
Santa Cruz	76.04	111,452	5.02%
Manrique	75.52	159,658	7.20%
Aranjuez	77.01	162,252	7.31%
Castilla	78.47	149,751	6.75%
Doce de Octubre	77.23	193,657	8.73%
Robledo	73.95	171,660	7.74%
Villa Hermosa	76.36	137,527	6.20%
Buenos Aires	75.75	136,774	6.17%
La Candelaria	75.83	85,505	3.85%
Laureles Estadio	79.09	122,243	5.51%
La América	78.82	96,278	4.34%
San Javier	73.82	138,063	6.22%
Poblado	81.69	128,839	5.81%
Guayabal	78.58	97,470	4.39%
Belén	78.99	196,694	8.87%

level. Since the main objective of the proposed methodology is to make an estimation of the cost associated to the lost productivity due to premature mortality because of earthquakes, a single value is needed for the city. For that reason, based on the number of inhabitants in each county shown in Table 3, a weighted average of the life expectancy at birth estimated in 76.96 years has been calculated.

At this stage it is possible to estimate the YLL_i of earthquakes as shown in Table 4 which, as expected, shows lower values for advanced ages if compared with younger ones.

Sum of the YLL_i equals the total number of years of life-lost due to premature mortality because of the earthquakes (YLL), which in this case corresponds to 86,550. Because the highest age range exceeds the life expectancy at birth, it is not added to the final result. Finally, to estimate the cost to society of these deaths as lost future productivity, YLL for ages between 15 and 64 years, equal to 58,589 are multiplied by the GDP per capita. For the

Table 4. Annual years of life-lost due to premature mortality because of earthquake by age range.

Age range	YLL_i
0 to 4	9,335
5 to 9	8,985
10 to 14	8,432
15 to 19	8,903
20 to 24	9,100
25 to 29	8,915
30 to 34	7,385
35 to 39	5,742
40 to 44	4,428
45 to 49	4,904
50 to 54	4,385
55 to 59	3,035
60 to 64	1,792
65 to 69	867
70 to 74	257
75 to 79	84
80+	—
TOTAL	86,550

case of Medellín that value has been established in US\$11,466 for 2014 (Brookings Institution 2015). With the data for this case study, that value corresponds to US\$672 million which is approximately 1.1 times the value of the *AAL* that considers only direct damage to the building portfolio (Salgado-Gálvez *et al.* 2014).

Conclusions

A methodology to estimate in a probabilistic and prospective way the economic cost in terms of lost production of the average annual number of years of life-lost has been presented herein. This metric can serve as a risk awareness measure, representing a step forward into the casualties' estimation field. The proposed methodology in one hand allows estimating in a prospective way the *AAD* which, when combined with demographic data, allows calculating *AALP_{YLL}* also in a prospective way, to account for the lost production. On the other hand, the proposed methodology can also be useful as a complementary metric to traditional risk assessments that only consider direct damages and losses to the built infrastructure. Since at the end the results of the built stock risk assessments and the *AALP_{YLL}* are expressed in monetary units, it seems reasonable to combine and compare the results to obtain a wider overall risk perspective.

AAD, besides being a robust and compact risk metric, is also a flexible one, since its estimation can be performed using different representations for the hazard, such as stochastic events or hazard curves. On the one hand stochastic events are generally preferred within the fully probabilistic risk modeling frameworks but, on the other hand, hazard is still widely represented through maps for different mean return periods in several regions of the world, from where the hazard curves can be obtained and that information be used for the estimation of *AAD*.

The possibility of estimating the number of life-lost years due to premature mortality because of earthquakes and their cost in terms of economic production in a prospective way constitutes a novel approach in which its main benefit can be seen as possibilities of developing *ex-ante* measures within a comprehensive disaster risk management scheme. Also, since the results are obtained in monetary units, they can be combined with the risk assessments that consider only direct damages and losses on the exposed stock to provide a more comprehensive catastrophic risk panorama of the area under analysis.

The methodology can be used at different resolution levels as long as the exposure databases contain information related to the building typologies and occupation levels. For most cases, seismic hazard at bedrock level and vulnerability functions do not require relevant changes but if local assessments are to be developed, detailed exposure databases and accounting for the dynamic soil response may be needed. National and sub-national assessments of *AALP_{YLL}* can be useful for both the performance assessment of disaster risk reduction actions as well as for comparing the overall risk levels. For national and sub-national assessments, the assumption of all years contributing the same to productivity may not hold and a differentiation or urban and rural areas, economic sectors and working age ranges may be needed.

It has been shown in the case study for Medellín that the annual cost of lost production associated to that cause can even exceed the one estimated for the direct damages on buildings; this can be interpreted as a credible result considering the importance as an economic

and industrial hub of the city combined with the low seismic risk awareness and associated seismic vulnerability of the built stock.

Because in some cases the age distributions and life expectancy at birth are available by gender, the methodology can be applied to explore differences among them, serving as a comparative measure in a field that has been identified as important in the disaster risk management field (Enarson *et al.* 2007). Also, the inclusion of the *YLD* estimation in the overall lost production is identified as a field of future research where, based on the disaster databases for earthquakes a disaggregation of injuries by type, severity, and recovery time may be obtained.

The application of the methodology can be expanded to other hazards and, even more, since *AAD* corresponds to a mathematical expectation, results can be directly added within the framework of multihazard analysis (Ordaz 2015; Jaimes *et al.* 2015). This is of special importance in areas where low frequency and high impact events associated to different origins (*i.e.*, geological, meteorological) can occur and cause deaths.

Acknowledgments

The authors thank two anonymous reviewers who contributed to improve the original version of the article.

Funding

The authors are grateful for the support of the Ministry of Education and Science of Spain “Enfoque integral y probabilista para la evaluación del riesgo sísmico en España”— CoPASRE (CGL2011-29063). They are also grateful to Spain’s Ministry of Economy and Competitiveness in the framework of the researcher’s formation program (FPI).

References

- AIS (Asociación Colombiana de Ingeniería Sísmica). 2010. Estudio General de la Amenaza Sísmica de Colombia. Comité AIS-300. Bogota DC, Colombia
- Algermissen ST, Dewey J, and Rinehart W. 1972. A study of earthquake losses in the San Francisco Bay area; data and analysis. National Oceanic and Atmospheric Administration, USA
- Brookings Institution. 2015. 2014 Global Metro Monitor Map. Available at <http://www.brookings.edu/research/reports2/2015/01/22-global-metro-monitor>
- Cardona OD, Ordaz M, Reinoso E, *et al.* 2010. Comprehensive Approach to Probabilistic Risk Assessment (CAPRA): International Initiative for Disaster Risk Management Effectiveness. Proceedings of the 14th European Conference on Earthquake Engineering. Ohrid, Macedonia
- Cardona OD, Ordaz M, Reinoso E, *et al.* 2012. CAPRA-Comprehensive Approach to Probabilistic Risk Assessment: International Initiative for Risk Management Effectiveness. Proceedings of the 15th World Conference on Earthquake Engineering. Lisbon, Portugal
- Coburn A and Spence R. 2002. Earthquake Protection, 2nd edit. John Wiley & Sons, Chichester, UK
- DANE (Departamento Administrativo Nacional de Estadística) and Alcaldía de Medellín. 2010. Proyecciones de Población Municipio de Medellín por edad, sexo, comunas y corregimientos. Available at https://www.medellin.gov.co/irj/go/km/docs/wpccontent/Sites/Subportal%20del%20Ciudadano/Planeaci%C3%B3n%20Municipal/Secciones/Indicadores%20y%20Estad%C3%ADsticas/Documentos/Proyecciones%20de%20poblaci%C3%B3n%202005-2015/08%20Proyecciones%20Poblaci%C3%B3n%20Medell%C3%ADn%202005-2015%20por%20comuna_correg%20y%20Grupos%20de%20Edad.pdf

- Enarson E, Fothergill A, and Peek L. 2007. Gender and disaster: foundations and directions. In: Rodríguez H, Quarantelli E, and Dynes R (eds), *Handbook of Disaster Research*, pp 130–146. Springer, New York, NY, USA
- ERN-AL (Evaluación de Riesgos Naturales América Latina). 2011. CAPRA-GIS v2.0. Program for probabilistic risk assessment. Available at <http://www.ecapra.org>
- FEMA (Federal Emergency Management Agency). 2003. Multi-Hazard Loss Estimation Methodology. Earthquake Model. HAZUS-HM MR4. Washington, DC, USA
- Ferreira MA, Oliveira CS, and Mota de Sá F. 2011. Estimating human losses in earthquake models: A discussion. In: Spence R, So E, and Scawthorn C (eds), *Human Casualties in Earthquakes*, pp 255–266. Springer, Dordrecht, The Netherlands
- Grossi P. 2004. Sources, nature and impact of uncertainties on catastrophe modeling. Proceedings of the 13th World Conference on Earthquake Engineering. Vancouver, Canada
- Guha-Sapir D, Below R, and Hoyois Ph. 2015. EM-DAT: International Disaster Database. Université Catholique de Louvain, Brussels, Belgium
- Jaimés MA, Reinoso E, and Esteva L. 2015. Risk analysis for structures exposed to several multi-hazard sources. *J Earthquake Eng* 19:297–312
- Jaiswal K and Wald D. 2010. An empirical model for global earthquake fatality estimation. *Earthquake Spectra* 26(4):1017–37
- Jaiswal KS, Wald DJ, Eartle PS, *et al.* 2011. Earthquake casualty models within the USGS Prompt Assessment of Global Earthquakes for Response (PAGER) system. In: Spence R, So E, and Scawthorn C (eds), *Human Casualties in Earthquakes*, pp 83–94. Springer, Dordrecht, The Netherlands
- Krishnamoorthy K, Harichandrakumar KT, Krishna-Kumari A, *et al.* 2005. Years of life lost and productivity loss due to tsunami in India. *Curr Sci* 89(5):739–40
- Liel AB and Deierlein GC. 2012. Using collapse risk assessments to inform seismic safety policy for older concrete buildings. *Earthquake Spectra* 28(4):1495–521
- Luco N and Cornell CA. 2007. Structure-specific scalar intensity measures for near-source and ordinary earthquake ground motions. *Earthquake Spectra* 23(2):357–92
- Marulanda MC. 2013. Modelación probabilista de pérdidas económicas por sismo para la estimación de la vulnerabilidad fiscal del Estado y la gestión financiera del riesgo soberano. PhD Thesis. Technical University of Catalonia, Barcelona, Spain
- Marulanda MC, Carreño ML, Cardona OD, *et al.* 2013. Probabilistic earthquake risk assessment using CAPRA: Application to the city of Barcelona, Spain. *Nat Haz* 69:59–84
- McClure FE, Degenkolb HJ, Steinbrugge KV, *et al.* 1979. Evaluating the Seismic Hazard of State Owned Buildings. California Seismic Safety Commission, Sacramento, CA, USA
- Murphy C, Gardoni P, and Harris CE Jr. 2011. Classification and moral evaluation of uncertainties in engineering modeling. *Sci Eng Ethics* 17:553–70
- Noy I. 2014. A non-monetary global measure of the direct impact of natural disasters. Background paper of the 2015 Global Assessment Report on Disaster Risk Reduction. Geneva, Switzerland
- Noy I. 2015. Comparing the direct human impact of natural disasters for two cases in 2011: The Christchurch earthquake and Bangkok flood. *Int J of Disaster Risk Reduct* 13:61–5
- OECD (Organization for Economic Co-operation and Development). 2014. OECD Employment Outlook 2015. OECD Publishing. doi:10.1787/empl_outlook-2014-en
- Olson DL and Wu DD. 2010. Earthquakes and risk management in China. *Hum Ecol Risk Assess* 16(3):478–93
- Ordaz M. 2000. Metodología para la evaluación del riesgo sísmico enfocada a la gerencia de seguros por terremoto. Universidad Nacional Autónoma de México, Mexico City, Mexico
- Ordaz M. 2015. A simple probabilistic model to combine losses arising from the simultaneous occurrence of several hazards. *Nat Haz* 76:389–96
- Ordaz M, Martinelli F, D’Amico V, *et al.* 2013. CRISIS2008: A flexible tool to perform probabilistic seismic hazard assessments. *Seismol Res Lett* 84(3):495–504
- Reitherman R. 1982. Computer-Aided Earthquake Analysis and Planning for Business and Organizations. National Science Foundation, USA
- RMS (Risk Management Solutions) 2015. RMS Commends Tokyo’s. 50 Percent Initiative2 for setting targets to reduce disaster casualties. Press release. Available at <http://www.rms.com/>

- about/newsroom/press-releases/press-detail/2015-04-07/rms-commends-tokyos-50-percent-initiative-for-setting-targets-to-reduce-disaster-casualties
- Rosenblueth E. 1976. Towards optimum design through building codes. *J Struct Div American Society of Civil Engineers* ST3:591–607
- Salgado-Gálvez MA, Bernal GA, Yamin LE, *et al.* 2010. Evaluación de la amenaza sísmica de Colombia. Actualización y uso en las nuevas normas colombianas de diseño sismo resistente NSR-10. *Rev. de Ing. Universidad de Los Andes* 32:28–37
- Salgado-Gálvez MA, Zuloaga-Romero D, Bernal GA, *et al.* 2014. Fully probabilistic seismic risk assessment considering local site effects for the portfolio of buildings in Medellín, Colombia. *Bull Earthquark Eng* 12:671–95
- Salgado-Gálvez MA, Zuloaga D, Velásquez CA, *et al.* 2015a. Urban Seismic Risk Index for Medellín, Colombia, based on probabilistic loss and casualties estimations. *Nat Haz*. doi: 10.1007/s11069-015-2056-4. In press
- Salgado-Gálvez MA, Carreño ML, Barbat AH, *et al.* 2015b. Evaluación probabilista del riesgo sísmico en Lorca mediante simulaciones de escenarios. *Rev. Intern. de método. numér. para calc. y diseño en ing.* doi:10.1016/j.rimni.2014.12.001. *In press*
- Salgado-Gálvez MA, Bernal GA, and Cardona OD. 2015c. Evaluación probabilista de la amenaza sísmica de Colombia con fines de actualización de la Norma Colombiana de Diseño de Puentes CCP-14. *Rev. Intern. de método. numér. para calc. y diseño en ing.* doi:10.1016/j.rimni.2015.07.001. *In press*
- Scawthorn C. 2011. Disaster casualties—Accounting for economic impacts and diurnal variation. In: Spence R, So E, and Scawthorn C (eds), *Human Casualties in Earthquakes*, pp 51–63. Springer, Dordrecht, The Netherlands
- Spence R and So E. 2009. Estimating Shaking-Induced Casualties and Building Damage for Global Earthquake Events. NEHRP Grant number 08HQGR0102. Final Technical Report UNISDR (United Nations International Strategy for Disaster Risk Reduction). 2015. Global Assessment Report on Disaster Risk Reduction. Geneva, Switzerland
- Velásquez CA, Cardona OD, Mora MG, *et al.* 2014. Hybrid loss exceedance curve (HLEC) for disaster risk assessment. *Nat Haz* 72:455–79
- Wang SY, Li YH, Chi GB, *et al.* 2008. Injury-related fatalities in China: An under-recognized public-health problem. *Lancet* 372:1765–73
- WHO (World Health Organization). 2004. *The global burden of disease: 2004 update*. WHO, Geneva, Switzerland
- WHO. 2013. *WHO methods and data sources for global burden of disease estimates 2000–2011*. WHO, Geneva, Switzerland